

THUN - THUN MULTI

The THUN heated towel rail, characterised by round tubes at its extremities, which are flattened to the centre, blending one with the


other, is particularly artistic and decorative. The pleasing effect of the original shape of the Thun tubes is immediately apparent only from

design Luigi Brembilla the front. As with the entire range of Brem towel rails, Thun also has an excellent thermal output, with minimum protrusion from the walls.


DIMENSIONS

Width 50 / 67 cm
Height 79,7 / 101,7 / 143 / 184,2 cm
Depth 4,5 cm
Depth from wall 6,5 cm


± 4,2



THUN 100 - ...

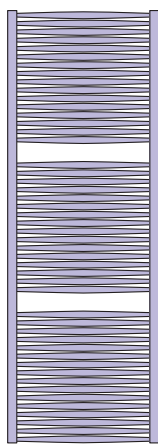

THUN 140 - ...

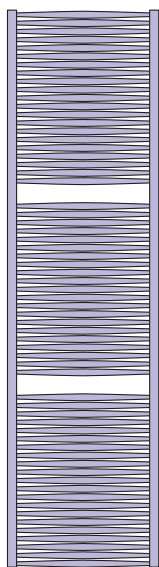


THUN 180 - ...


DIMENSIONS

Width 97 / 127 / 144 cm
Height 55 / 66 / 80 cm
Depth 4,5 cm
Depth from wall 6,5 cm


4,2 ±



THUN DUE 55 - ...



THUN DUE 66 - ...

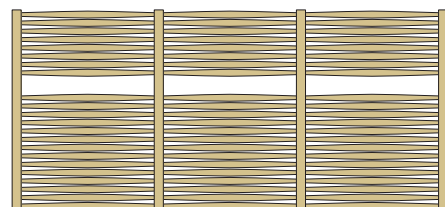

THUN TRE ...-145

MODEL	€	Watt Δt 50 K	▲▼ t.c. cm	Height cm	Width cm	Weight M Kg	Volume V dm³	Electric version extra €	Electrical immersion heater class I W	Mixed version with TR* extra €
THUN 80-50	516,00	432	47	79,7	50	6,9	2,4	154,10	400	98,70
THUN 100-50	659,30	531	47	101,7	50	8,4	3,0	-	-	-
THUN 100-65	820,80	672	64	101,7	67	11,1	3,5	175,40	650	102,20
THUN 140-50	927,00	761	47	143	50	12,2	4,3	175,40	650	102,20
THUN 140-65	1153,70	963	64	143	67	16,1	5,0	207,20	900	108,90
THUN 180-50	1194,40	999	47	184,2	50	15,9	5,6	207,20	900	108,90
THUN 180-65	1498,40	1265	64	184,2	67	21	6,5	-	-	-
THUN CROM 100-50	1186,80	425	47	101,7	50	8,4	3,0	154,10	400	98,70
THUN CROM 140-50	1668,60	609	47	143	50	12,2	4,3	175,40	650	102,20
THUN CROM 180-50	2114,70	799	47	184,2	50	15,9	5,6	207,20	900	108,90
THUN DUE 55-100	656,90	662	94	55	97	13,6	3,2	-	-	-
THUN DUE 55-130	805,40	838	124	55	127	18	3,8	-	-	-
THUN TRE 55-145	936,40	993	141	55	144	20	4,7	-	-	-
THUN DUE 66-100	712,70	728	94	66	97	15,1	3,7	-	-	-
THUN DUE 66-130	876,20	922	124	66	127	20	4,3	-	-	-
THUN TRE 66-145	1020,20	1092	141	66	144	22,3	5,3	-	-	-
THUN DUE 80-100	855,10	897	94	80	97	18,6	4,5	-	-	-
THUN DUE 80-130	1056,50	1135	124	80	127	24,6	5,2	-	-	-

EN 442 Watt Δt 50 K

Mixed version: tapping centres = L - 11 cm

STANDARD PRODUCTION

White "sablé" SB9010 paintwork-white brackets
Tolerance ± 3 mm - Air vent ø 1/8"
Maximum operating pressure 6 bar

PRODUCTION ON REQUEST

Paint to Brem color list with chrome-plated brackets +15/35%
Side fittings (▲▼ H-4 cm) Art. AL 47,70€

STANDARD CONNECTION

EG Ø 1/2"
* TR accessory included
Electrical and mixed versions p.224

