

# SLIDE

design Davide Brembilla


The project starts from the decomposition of a flat surface, creating dynamic volumes. The sculptural forms of the heating element

has great impact in the domestic atmosphere. SLIDE has a high heating output, 600 to 900 watt, and the different color finishes


make it the leading part in the bathroom.

## DIMENSIONS


Width: 50/128/152 cm  
Height: 48/62/136/180 cm  
Depth: 15 cm  
Depth: from wall 190 mm

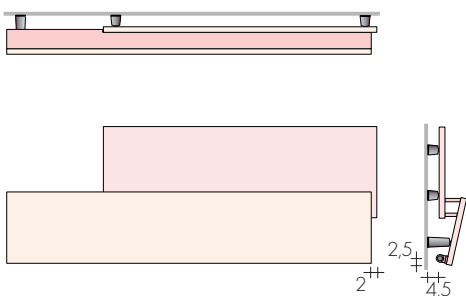

SLIDE 48 - 128  
SLIDE 62 - 152

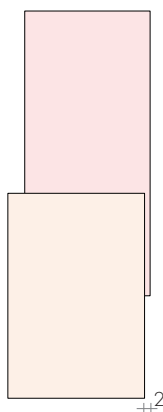

SLIDE 136 - 50

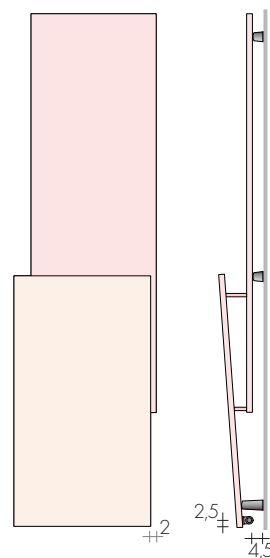

SLIDE 180 - 50

MODEL		€	Watt $\Delta t$ 50 K	$\blacktriangle \nabla$ t.c. cm	Height cm	Width cm	Weight M Kg	Volume V dm <sup>3</sup>	EN 442 Watt $\Delta t$ 50 K		
									Electric versions extra €	Electrical immersion heater cl.I W	Mixed versions T extra €
SLIDE	48-128	1377,50	617	112	48(32-32)	128 (96)	18,3	7,5	175,40	650	102,20
SLIDE	62-152	1558,10	934	136	62(44-32)	152 (120)	28,6	11,4	207,20	900	108,90
SLIDE	136-50	1143,70	647	30	136	50	20,6	7,9	175,40	650	102,20
SLIDE	180-50	1315,80	904	30	180	50	28,2	11,0	207,20	900	108,90

Reverse valves: Quadra valves recommended

MAXIMUM OPERATING PRESSURE 3 BAR

FITTINGS with REMOTE VALVES, page 232

STANDARD PRODUCTION  
White "sablé" SB9010 paintwork  
White brackets

PRODUCTION ON REQUEST  
Paintwork to Brem color list  
(sablé colors are recommended) +15/35%

STANDARD FITTING REG  $\varnothing$  1/2"  
Electric and mixed versions p.224

