

MAGIC-LUX

The base is a heating element, bright and decorative, a feature in its own right: plus

there's the light! A series of LEDs along the side creates a bright strip, the colours




design Luciano Maciotta ranging from white to red to blue. For a magical atmosphere.

MAH MODEL
vertical plate


MALH MODEL
vertical plate with radiating fins at the rear

H = from 180 to 200 cm

L = from 28 to 77 cm (every 7 cm)

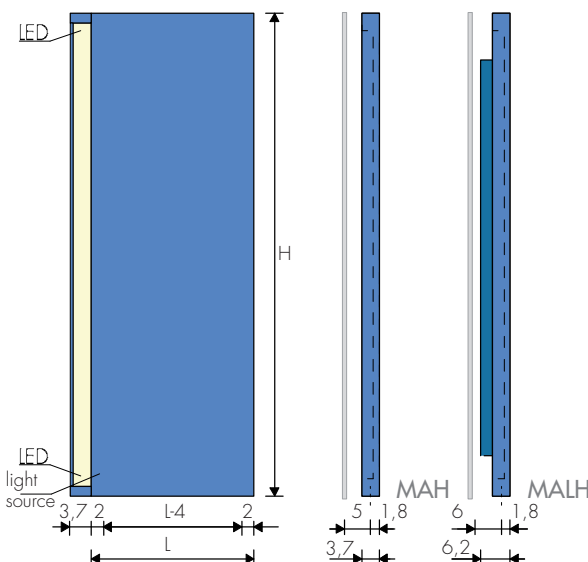

TAPPING CENTRES




Vertical fittings

▲ ▽ t. c. = L-4 cm

Side fittings only on the right

▲ ▽ t. c. = H-3,2 cm

Art. AS 67,10€



MOD.	H cm	L cm (nominale)	28	35	42	49	56	63	70	77	EN 442 Watt Δt 50 K
MAH 180	€		1322,20 467w	1383,80 584w	1444,80 701w	1508,50 817w	1571,40 934w	1632,30 1051w	1696,00 1168w	1757,80 1284w	
MALH 180	€		1494,30 689w	1572,50 861w	1643,40 1033w	1730,20 1205w	1808,90 1377w	1887,10 1549w	1966,00 1721w	2045,00 1893w	
MAH 200	€		1354,20 513w	1419,20 642w	1485,10 770w	1547,20 898w	1612,70 1026w	1677,20 1155w	1741,70 1283w	1808,00 1411w	
MALH 200	€		1550,20 742w	1635,80 928w	1720,10 1113w	1811,50 1299w	1890,10 1484w	1974,40 1670w	2059,10 1855w	2142,40 2041w	

TOTAL L = nominal L + 4 cm
3,7 cm on the left side (for LED) + 0,3 cm on the right side

LED COLORS as you like: WHITE - RED/ORANGE - BLUE
State in your order max. 2 colors and their position (up and down)

FITTINGS with REMOTE VALVES (page 232)

STANDARD PRODUCTION
White "sablé" SB9010 paintwork-galv. brackets
Air valve ø 1/8" - Tolerance ± 3mm

PRODUCTION ON REQUEST
Paintwork to Brem color list +15/35%

STANDARD FITTINGS
EG Ø 1/2"
Maximum operating pressure 6 bar

