

Kcal = Watt x 0.860  
BTU = Watt x 3.413


Watt  $\Delta t$  60° = Watt  $\Delta t$  50° x 1.260  
Watt  $\Delta t$  40° = Watt  $\Delta t$  50° x 0.754  
Watt  $\Delta t$  30° = Watt  $\Delta t$  50° x 0.523  
Watt  $\Delta t$  20° = Watt  $\Delta t$  50° x 0.313

p max = 8.0 bar

**Reversible radiator**  
**Radiateur réversible**  
**Reversibler Heizkörper**  
**Radiador reversible**


[F]


Standard connection / Raccord standard  
Standard Anschluss / Conexión estándar

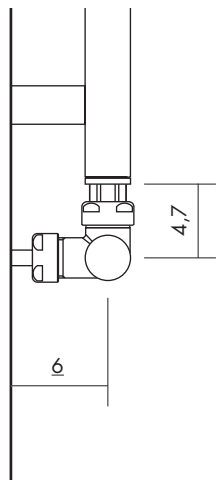

[H]

Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

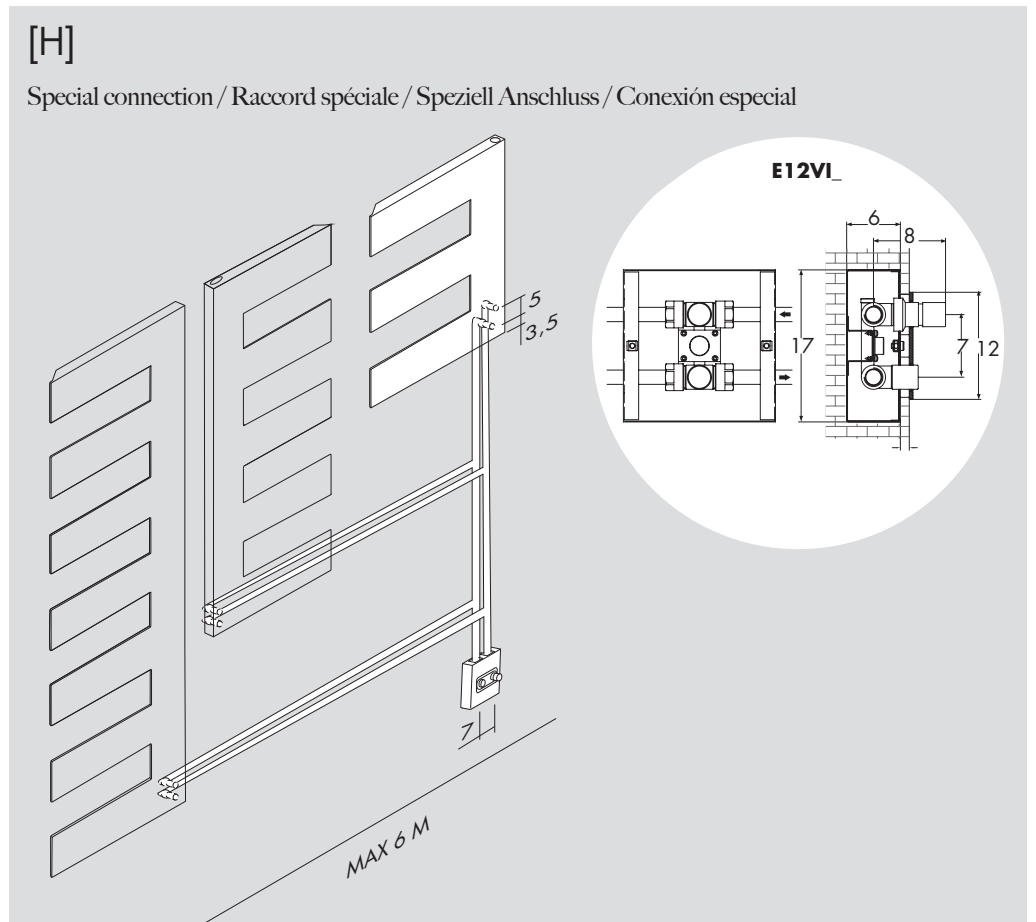

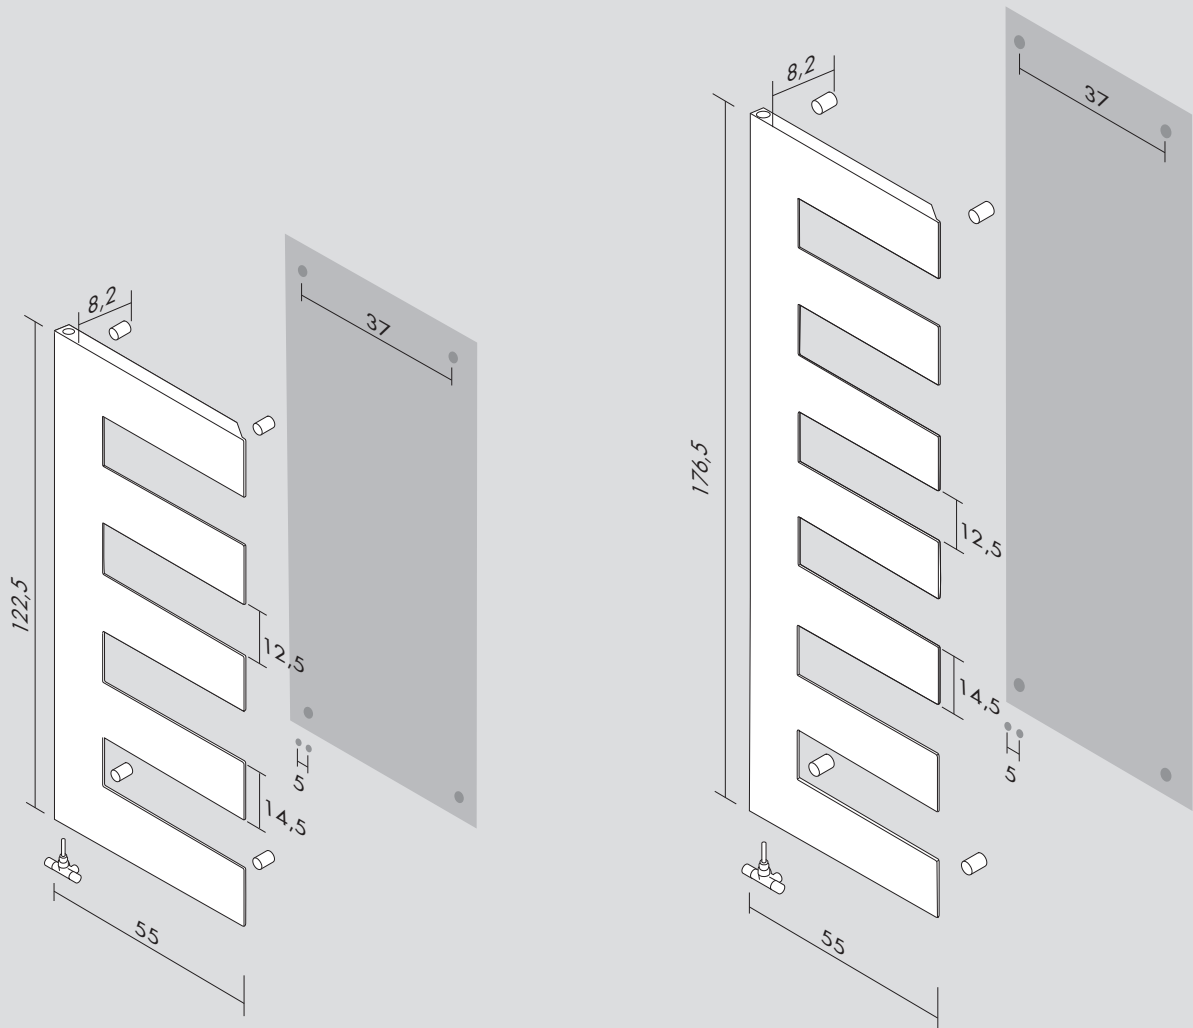

### Pettine

H cm	L cm	l* cm	art*	l*	watt $\Delta t$ 30°	watt $\Delta t$ 50°
68.5	55.0	5.0	<b>PTNA068055_</b>	1.0	147	<b>282</b>
122.5	55.0	5.0	<b>PTNA122055_</b>	1.9	248	<b>474</b>
176.5	55.0	5.0	<b>PTNA176055_</b>	2.8	338	<b>647</b>

### Optional




Angled monotube valve  
 Vanne monotube équerre  
 Einrohrige Ventil  
 Válvula monotubo a escuadra

[BIAN] **E12MBSQB**  
 [CROM] **E12MBSQR**




Thermostatic head  
 Tête thermostatique  
 Thermostatkopf  
 Cabezal termostático

[BIAN] **TTB**  
 [CROM] **TTR**

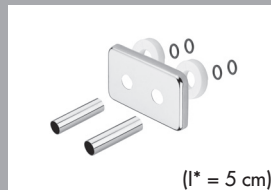

Sleeving kit  
 Kit couvre tuyau  
 Rosetten  
 Kit cubre tubo

[BIAN] **C5B**  
 [CROM] **C5R**

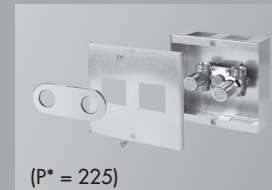

Built-in valves  
 Vanne à encaisse  
 Einbauventile  
 Válvulas de empotrar

[BIAN] **E12VIB**  
 [CROM] **E12VIR**

**art\*** = item / modèle / Artikel / artículo    **l\*** = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones  
**l\*** = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento  
**P\*** = page / page / Seite / página