

START


The START heated towel rail is produced using thin radiating tubes connected to vertical manifolds forming the exclusive

pointed arch shape. The straight version is unusual in that it has offset upper tubes to improve the distribution of the heat.


The valves are positioned on the inside, to produce a clean design, reducing the total space taken up by the towel rail.

DIMENSIONS


Width 35 / 45 / 55 / 60 / 70 cm
Height 75 / 90 / 120 / 150 / 180 cm
Depth 4,7 cm
Depth from wall 10 cm




START 75 - ...

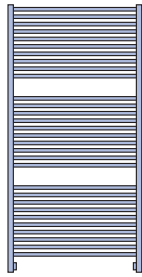


START 90 - ...



START 120 - ...



START 150 - ...

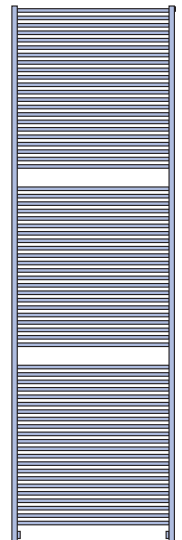

START 180 - ...

MODEL	€	Watt Δt 50 K	▲▼ t.c. •cm	Height cm	Width cm	Weight M Kg	Volume V dm ³	Electric version extra €	EN 442 electrical immersion cl. I W	Mixed version with M* extra €
START 75-45	308,10	339	31	75	45	4,4	1,46	-	-	-
START 75-55	322,70	401	41	75	55	5,0	1,65	154,10	400	98,70
START 90-45	376,80	409	31	90	45	5,4	1,79	154,10	400	98,70
START 90-55	392,90	484	41	90	55	6,2	2,03	154,10	400	98,70
START 90-60	401,40	522	46	90	60	6,6	2,15	-	-	-
START 120-45	450,60	552	31	120	45	7,4	2,46	-	-	-
START 120-55	466,90	654	41	120	55	8,6	2,79	175,40	650	102,20
START 120-60	474,40	706	46	120	60	9,1	2,95	175,40	650	102,20
Slim START 150-35	546,90	573	21	150	35	7,1	2,43	175,40	650	102,20
START 150-45	562,90	703	31	150	45	9,4	3,12	175,40	650	102,20
START 150-55	586,90	832	41	150	55	10,9	3,54	207,20	900	108,90
START 150-60	599,30	896	46	150	60	11,6	3,76	207,20	900	108,90
Slim START 180-35	629,30	706	21	180	35	9,6	2,94	175,40	650	102,20
START 180-45	645,30	861	31	180	45	11,5	3,78	207,20	900	108,90
START 180-55	669,30	1016	41	180	55	13,3	4,30	207,20	900	108,90
START 180-60	685,70	1094	46	180	60	14,2	4,56	-	-	-
START 180-70	716,90	1249	56	180	70	15,9	5,08	-	-	-
ST-CROM 90-45	839,20	327	31	90	45	5,4	1,79	-	-	-
ST-CROM 120-45	1002,60	442	31	120	45	7,4	2,46	154,10	400	98,70
ST-CROM 120-55	1038,80	523	41	120	55	8,6	2,79	-	-	-
ST-CROM 150-35	1216,90	458	21	150	35	7,1	2,43	154,10	400	98,70
ST-CROM 150-45	1253,20	562	31	150	45	9,4	3,12	-	-	-
ST-CROM 150-55	1307,70	666	41	150	55	10,9	3,54	175,40	650	102,20
ST-CROM 180-35	1401,00	565	21	180	35	9,6	2,94	-	-	-
ST-CROM 180-55	1491,30	813	41	180	55	13,3	4,30	207,20	900	108,90

Made-to-measure versions on request

• Reverse valves Brem, page 190

STANDARD PRODUCTION


White "sablé" SB9010 paintwork-white brackets
Chrome-plated finish with chrome brackets
Tolerance ± 3 mm - Air vent ø 1/8"
Maximum operating pressure 8 bar

PRODUCTION ON REQUEST

Paint to Brem color list +15/35%
Height reduced by 4 cm (H1) for:
- side fittings (▲▼: H1-4cm) Art. AL 47,70€
- fittings EG (▲▼: L-1,8cm) Art. AVR 54,40€

STANDARD CONNECTION

REG Ø 1/2"
*M heating element sleeve included
Electrical version (H-4cm) page 224



START CURVO

The START CURVO is the first heated towel rail with rounded surfaces. The original design

of pure and slightly arched lines makes START unique in shape while increasing its

practicality. The valves are positioned on the inside, reducing the total space taken up.


DIMENSION

Width 54 cm


Height 60 / 90 / 120 / 150 / 180 cm

Depth 6 cm


Depth from wall 8,5 cm

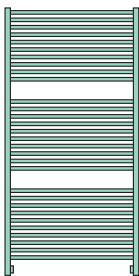

ST-CURVO 90 - 55



ST-CURVO 120 - 55

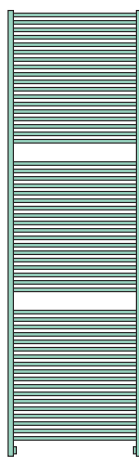

ST-CURVO 150 - 55



ST-CURVO 180 - 55

MODEL		€	Watt Δt 50 K	▲▼ t.c. •cm	Height cm	Width cm	Weight M Kg	Volume V dm ³	Electric version extra €	electrical immersion cl. I W	EN 442 Watt Δt 50 K Mixed version with M* extra €
ST-CURVO	60-55	395,00	320	39,5	60	54	4,1	1,53	-	-	-
ST-CURVO	90-55	539,50	484	39,5	90	54	6,2	2,03	154,10	400	98,70
ST-CURVO	120-55	626,90	654	39,5	120	54	8,6	2,79	175,40	650	102,20
ST-CURVO	150-55	764,80	832	39,5	150	54	10,9	3,54	207,20	900	108,90
ST-CURVO	180-55	846,60	1016	39,5	180	54	13,3	4,30	-	900	108,90
C-CROM	60-55	848,00	256	39,5	60	54	4,1	1,53	-	-	-
C-CROM	90-55	1127,50	387	39,5	90	54	6,2	2,03	154,10	400	98,70
C-CROM	120-55	1309,50	523	39,5	120	54	8,6	2,79	-	-	-
C-CROM	150-55	1597,60	666	39,5	150	54	10,9	3,54	175,40	650	102,20
C-CROM	180-55	1768,00	813	39,5	180	54	13,3	4,30	207,20	900	108,90

• Tapping centres with Reverse valves Brem

STANDARD PRODUCTION

White "sablé" SB9010 paintwork-white brackets

Chrome-plated finish with chrome brackets

Tolerance ± 3 mm - Air vent ø 1/8"

MAXIMUM OPERATING PRESSURE 8 BAR

PRODUCTION ON REQUEST

Paint to Brem color list +15/35%

Height reduced by 4 cm (H1) for:

- side fittings (▲▼: H1-4cm) Art. AL 47,70€

- EG fittings (▲▼: L-1,8cm) Art. AVR 54,40€

STANDARD CONNECTION

REG Ø 1/2"

Electrical version (H-4cm) p.224

Reverse valves page 235

