

# KORE

design Luigi Brembilla

KORE is a heated towel rail made using the exclusive flat curved Brem tubes as manifolds, with the addition of small radiating tubes

applied in an original-looking design, with the aim of obtaining high thermal outputs to satisfy the requirements of the bathroom.

The frames only can be additionally enhanced with the application of gilded leaf on BRO019 color and silver leaf on BRO002 color.


## DIMENSIONS

Width 32 / 54 / 64 / 79 cm


Height 54 / 79 / 117 / 153 / 175 cm

Depth 4,8 cm


Depth from wall 12,5 cm




KORE 55-...




KORE 80-...

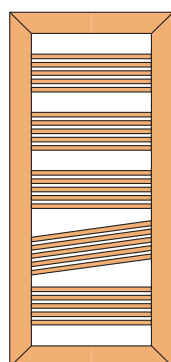

KORE 120-...

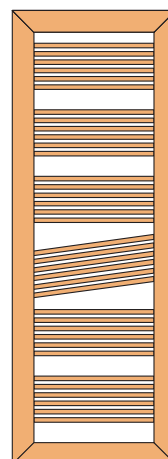

KORE 150-...

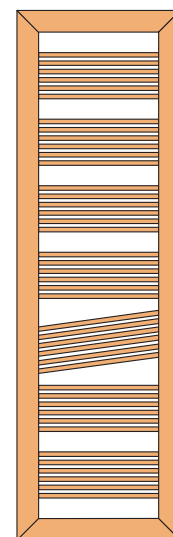

KORE 175-...

MODEL	€	Watt Δt 50 K	▲▼ t.c. cm	Height cm	Width cm	Weight M Kg	Volume V dm <sup>3</sup>	Electric version *extras €	Electrical immersion heater c.l.I W	Mixed version *extras €	Only frame in gilded/silver leaf ^extra €
KORE 55-55	406,90	316	19	54	54	2,5	0,76	-	-	-	399,90
KORE 55-80	441,80	426	19	54	79	3,6	1,1	279,50	400	230,20	424,60
KORE 80-55	472,20	411	19	79	54	3,2	0,97	279,50	400	230,20	424,60
KORE 80-80	541,50	554	19	79	79	4,7	1,41	316,40	650	249,40	444,50
KORE 120-32	688,60	378	19	117	32	3,5	1,05	279,50	400	230,20	464,10
KORE 120-55	736,40	538	19	117	54	5,6	1,7	316,40	650	249,40	484,00
KORE 150-32	820,80	453	19	153	32	5,9	1,47	279,50	400	230,20	493,90
KORE 150-55	883,60	645	19	153	54	7,8	2,37	316,40	650	249,40	513,70
KORE 175-32	953,00	528	19	175	32	6,3	1,89	316,40	650	249,40	513,70
KORE 175-55	1030,80	752	19	175	54	10,1	3,05	347,90	900	257,40	538,40
KORE 175-65	1065,70	854	19	175	64	11,8	3,59	347,90	900	257,40	548,20
KORE 175-80	1152,00	1006	19	175	79	14,5	4,38	-	-	-	563,10

EN 442 Watt Δt 50 K

• Reverse Brem valves on the back of the lower tube

^Application of the leaf on the frame of Kore:  
- gilded leaf on golden color BRO019  
- silver leaf on aluminium color BRO002  
(apply extra for color)

MINIMUM OPERATING PRESSURE 1,5 BAR  
MAXIMUM OPERATING PRESSURE 3 BAR



\*Extra manifolds whit electric immersion heater

## STANDARD PRODUCTION

White "sablé" SB9010 paintwork-white brackets  
Tolerance ± 3 mm - Air vent ø 1/8"  
Gilded/silver leaf finish versions with  
brackets colored in BRO019/BRO002

## PRODUCTION ON REQUEST

Paint to Brem color list Brem with  
chrome-plated brackets +15/35%  
Valves in Gilded/Silver leaf finish page 235  
Brackets in Gilded/Silver leaf finish p. 235

## STANDARD FITTING

REG Ø 1/2"

EG fittings on request ▲▼ 5 cm  
Fittings on request, page 233



# KORE COR - KORE CROM



KORE COR resumes the graphic play expressed in Kore with only one frame, elegant and essential. On request, available with the addition of three radiating tubes for

towels. KORE MIRA steps away from the traditional heated towel rail function with the application of mirror inside the frame. An impressive and unusual interior décor


effect. KORE COR models available in gold and aluminium color can be additionally enhanced with the application of gilded and silver leaf

## DIMENSIONS


Width 32 / 54 / 79 cm  
Height 54 / 79 / 117 / 153 / 175 cm  
Depth 4,4 cm  
Depth from wall 8,8 cm




K-COR 55 - ...  
K-CROM 55 - ...




K-COR 80 - ...  
K-CROM 80 - ...

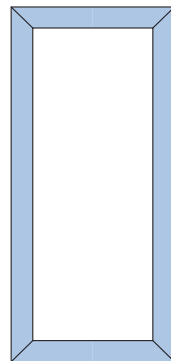

K-COR 120 - ...  
K-CROM 120 - ...



K-COR 150 - ...  
K-CROM 150 - ...

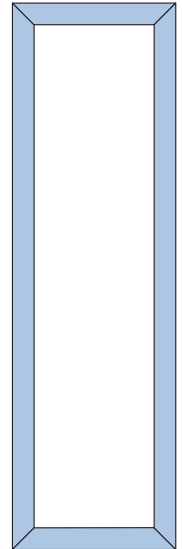


K-COR 175 - ...  
K-CROM 175 - ...

MODEL	€	Watt Δt 50 K	▲ ▼ t.c. •cm	Height cm	Width cm	Weight M Kg	Volume V dm <sup>3</sup>	KORE MIRA with mirror ART. KM extra €	GILDED/SILVER LEAF *K-COR version extra €
K-COR 55-55	235,50	160	19	54	54	0,29	0,08	162,40	399,90
K-COR 55-80	277,10	202	19	54	79	0,37	0,10	169,50	424,60
K-COR 80-55	277,10	202	19	79	54	0,37	0,10	204,70	424,60
K-COR 80-80	313,70	245	19	79	79	0,45	0,12	211,80	444,50
K-COR 120-32	284,40	219	19	117	32	0,42	0,11	261,20	464,10
K-COR 120-55	315,50	254	19	117	54	0,49	0,13	268,30	484,00
K-COR 150-32	301,60	278	19	153	32	0,52	0,14	303,70	493,90
K-COR 150-55	333,30	312	19	153	54	0,59	0,16	310,70	513,70
K-COR 175-32	319,00	314	19	175	32	0,61	0,16	346,00	513,70
K-COR 175-55	353,20	349	19	175	54	0,68	0,18	353,10	538,40
K-CROM 55-55	857,80	133	19	54	54	0,29	0,08	162,40	
K-CROM 55-80	996,10	168	19	54	79	0,37	0,10	169,50	
K-CROM 80-55	996,10	168	19	79	54	0,37	0,10	204,70	
K-CROM 80-80	1134,90	203	19	79	79	0,45	0,12	211,80	
K-CROM 120-32	1126,50	182	19	117	32	0,42	0,11	261,20	
K-CROM 120-55	1256,20	211	19	117	54	0,49	0,13	268,30	
K-CROM 150-32	1332,80	226	19	153	32	0,52	0,14	303,70	
K-CROM 150-55	1462,50	255	19	153	54	0,59	0,16	310,70	
K-CROM 175-32	1533,40	261	19	175	32	0,61	0,16	346,00	
K-CROM 175-55	1663,20	290	19	175	54	0,68	0,18	353,10	

EN 442 Watt Δt 50 K

GILDED/SILVER LEAF  
\*K-COR version  
extra  
€




K-COR+Mira+gilded leaf

• Reverse Brem valves at the back of bottom tube

MINIMUM OPERATING PRESSURE 1,5 BAR  
MAXIMUM OPERATING PRESSURE 3 BAR

No. 3 radiating tubes (57W)  
with M4. Version:  
white Art. K3V 82,80€  
chr.-plated Art. K3C114,50€



## STANDARD PRODUCTION

White "sablé" SB9010 paintwork-white brackets  
Tolerance ± 3 mm - Air vent ø 1/8"  
\*BR0019/0002MS brackets

## PRODUCTION ON REQUEST

Paint to Brem color list with chrome-plated  
brackets +15/35%  
Gilded/silver leaf finish valves/brackets p.235

## STANDARD FITTING

REG Ø 1/2"  
Special fittings, page 233  
Electric versions, on request

