

QUAR

QUAR: an original heated towel rail with a pure geometrical expression.

In QUAR, the tube is square, not round. A large rectangular section frame replaces

the usual manifolds while increasing heat output at the same time.


DIMENSIONS

Width 30,5 / 46,5 / 54,5 / 62,5 / 70,5 cm

Height 86,5 / 118,5 / 150,5 / 182,5 cm

Depth 2 cm

Depth from wall 10 cm

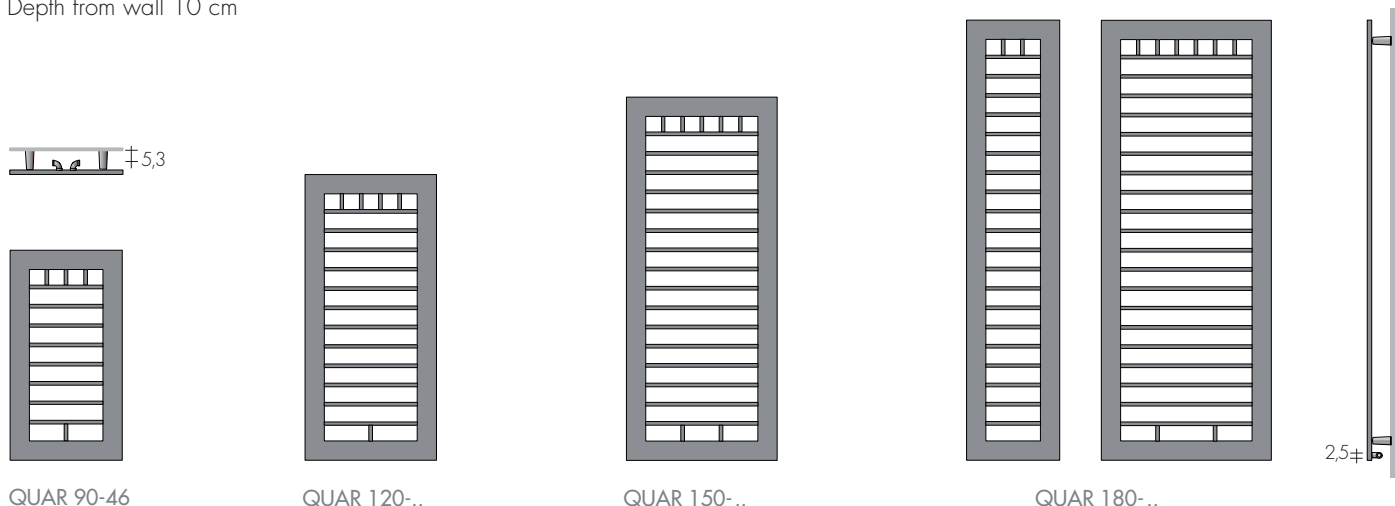

MODEL		€	Watt Δt 50 K	▲▼ t.c. cm	Height cm	Width cm	Weight M Kg	Volume V dm ³	Electric versions extra €	electrical immersion heater cl.I W	Mixed version with sleeve extra €
QUAR	90-46	664,70	347	19	86,5	46,5	9,9	3,7	-	-	-
QUAR	120-46	717,10	466	19	118,5	46,5	11,4	4,3	117,10	400	67,80
QUAR	120-54	731,20	510	19	118,5	54,5	12,5	4,7	-	400	67,80
QUAR SLIM	150-30	760,80	478	19	150,5	30,5	11,4	4,4	-	400	67,80
QUAR	150-46	795,40	581	19	150,5	46,5	14,1	5,6	142,80	650	75,80
QUAR	150-54	812,30	632	19	150,5	54,5	15,4	5,8	142,80	650	75,80
QUAR	150-62	829,40	683	19	150,5	62,5	16,8	6,3	-	650	75,80
QUAR SLIM	180-30	849,50	578	19	182,5	30,5	15,3	5,8	142,80	650	75,80
QUAR	180-46	885,60	696	19	182,5	46,5	16,8	6,4	142,80	650	75,80
QUAR	180-54	904,00	755	19	182,5	54,5	18,3	6,9	-	650	75,80
QUAR	180-62	922,40	815	19	182,5	62,5	19,9	7,4	171,30	900	80,80
QUAR	180-70	958,60	876	19	182,5	70,5	21,4	7,9	171,30	900	80,80

• Reverse Brem valves: Quadra valves recommended

MAXIMUM OPERATING PRESSURE 3 BAR

FITTINGS with REMOTE VALVES, page 232

STANDARD PRODUCTION

White "sablé" SB9010 paintwork-white brackets
Tolerance ± 3 mm - Air vent ø 1/8"

PRODUCTION ON REQUEST

Paint to Brem color list with
chrome-plated brackets

+15/35%

STANDARD FITTING

REG Ø 1/2" t.c. ▲▼ 19 cm
EG fittings on request (t.c. 5 cm)

