

KELLY POLISHED STAINLESS STEEL



Minimal shapes for this new model in polished stainless steel. Two vertical collectors supporting the horizontal tubes acting as useful towel hangers. Quality of finishing gives to this model elegance and refinement.

Material:

- · Vertical collectors in polished stainless steel with ø of 38 mm.
- Horizontal heating elements in polished stainless steel with ø of 18 mm

Fixing kit:

- Brackets
- Airvent
- Hexagonal tool
- Plugs and screws for mounting suitable for use on compact or hollow brick walls
- User notice

Packaging:

The radiator is protected by a recyclable film in polyethylene and with a box in recyclable carton. User notice included.

It is totally made in stainless steel with an unalterable finishing. Brightness guaranteed during the years.

Accessories and spare parts:

See page 157.


P. max: 8 bar	Available for central heating systems
T. max: 95° C	Connections: n° 4 x 1/2" gas









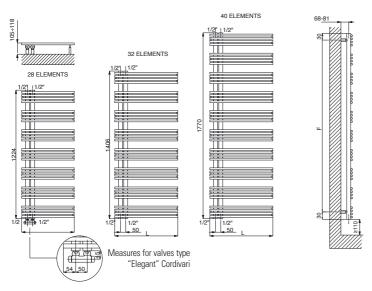

UPSIDE DOWN



KELLY

Code Nr.	Height	Width	Pipe Centres	Fixing kit centres	Dry Weight	Water Content	Thermal output $\Delta t = 50^{\circ}C$		75/65/20°C (Δt=50°C)
	[mm]	L [mm]	I [mm]	F [mm]	[Kg]	[lt]	Watts	Kcal/h	* Thermal output φ in Watts and Δt in °C
3551780400101	1224	500	50	1164	10,1	4,5	441	379	φ= 2,8576 * Δt ^{1,2881}
3551780400111		600	50	1164	11,4	4,6	512	440	φ= 3,3568 * Δt ^{1,2851}
3551780400102	1406	500	50	1346	11,3	5,2	496	427	φ= 3,4611 * Δt ^{1,2692}
3551780400112		600	50	1346	12,9	5,4	594	511	φ= 3,8777 * Δt 1,2862
3551780400103	1770	500	50	1710	14,4	6,4	634	545	φ= 3,9367 * Δt ^{1,2990}
3551780400113		600	50	1710	16,3	7,0	738	635	φ= 4,8746 * Δt ^{1,2832}

^{*} For output at different Δt than 50°C, see page 162.

ACCESSORIES




C = Copper connection • M = Multilayer connection



C = Copper connection • M = Multilayer connection

Ø 14/16/18

5991990301025



Ø 10/12/14/15/16 5991990301026