

# Trim Bath


UNI EN 442 Δt 50° 75°/65°/20° - Δt 30° 55°/45°/20°



Kcal = Watt x 0.860  
BTU = Watt x 3.413


Watt Δt 60° = Watt Δt 50° x 1.255  
Watt Δt 40° = Watt Δt 50° x 0.758  
Watt Δt 30° = Watt Δt 50° x 0.530  
Watt Δt 20° = Watt Δt 50° x 0.320

p max = 10.0 bar

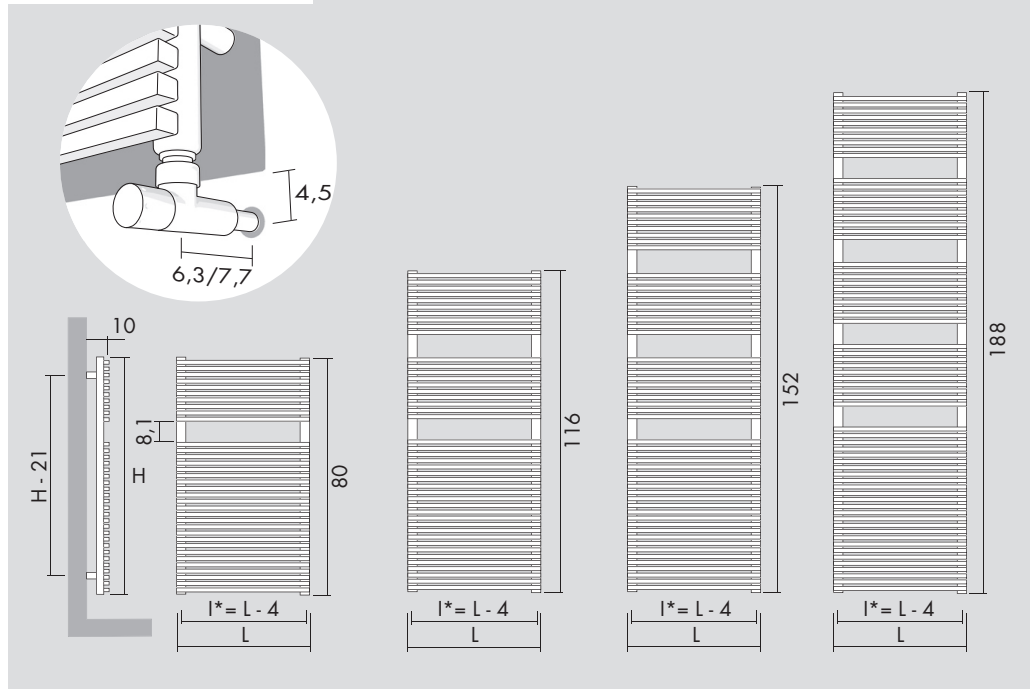


H cm	L cm	l* cm	art*	[B] STOCK	lt*	watt Δt 30°	watt Δt 50°
80.0	40.0	36.0	<b>HB15S040080_</b>	STOCK	5.1	236	<b>446</b>
80.0	50.0	46.0	<b>HB15S050080_</b>	STOCK	6.0	295	<b>556</b>
80.0	60.0	56.0	<b>HB15S060080_</b>	STOCK	6.9	352	<b>665</b>
116.0	40.0	36.0	<b>HB15S040116_</b>	STOCK	7.3	330	<b>622</b>
116.0	50.0	46.0	<b>HB15S050116_</b>	STOCK	8.5	410	<b>774</b>
116.0	60.0	56.0	<b>HB15S060116_</b>	STOCK	9.8	490	<b>925</b>
152.0	40.0	36.0	<b>HB15S040152_</b>	STOCK	9.4	420	<b>793</b>
152.0	50.0	46.0	<b>HB15S050152_</b>	STOCK	11.0	523	<b>986</b>
152.0	60.0	56.0	<b>HB15S060152_</b>	STOCK	12.6	625	<b>1 180</b>
188.0	40.0	36.0	<b>HB15S040188_</b>	STOCK	11.5	520	<b>982</b>
188.0	50.0	46.0	<b>HB15S050188_</b>	STOCK	13.5	634	<b>1 196</b>
188.0	60.0	56.0	<b>HB15S060188_</b>	STOCK	15.5	758	<b>1 431</b>

Standard connection / Raccord standard  
Standard Anschluss / Conexión estándar

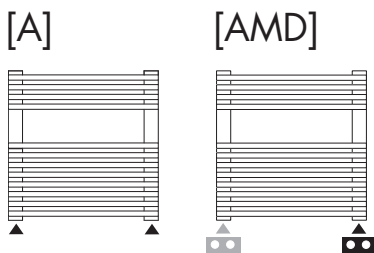

Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

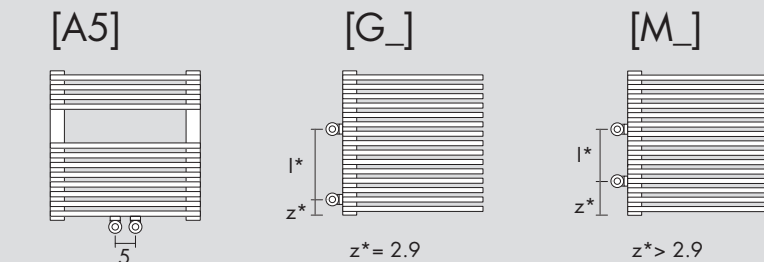


Replace \_ with connection S (Left) or D (Right). / Remplacer le \_ avec raccordement S (Gauche) ou D (Droite). /  
Um linker oder rechter Anschluss zu bestellen, bitte das Symbol \_ mit S (links) oder D (rechts) ersetzen. /  
Sustituir el \_ con las conexiones S (Izquierda) o D (Derecha).

art\* = item / modèle / Artikel / artículo    l\* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones  
lt\* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento


Dual application with schuko plug / Version mixte avec prise schuko / Kombimodell mit Schukosteckdose / Versión mixta con enchufe schuko

H cm	L cm	I* cm	art*	[B] STOCK	Lt*	watt Δt 30°	watt Δt 50°	watt
80.0	40.0	29.5	<b>MC HB155040080</b>	STOCK	5.1	236	<b>446</b>	350
80.0	50.0	39.5	<b>MC HB155050080</b>	STOCK	6.0	295	<b>556</b>	500
80.0	60.0	49.5	<b>MC HB155060080</b>	STOCK	6.9	352	<b>665</b>	500
116.0	40.0	29.5	<b>MC HB155040116</b>	STOCK	7.3	330	<b>622</b>	500
116.0	50.0	39.5	<b>MC HB155050116</b>	STOCK	8.5	410	<b>774</b>	700
116.0	60.0	49.5	<b>MC HB155060116</b>	STOCK	9.8	490	<b>925</b>	700
152.0	40.0	29.5	<b>MC HB155040152</b>	STOCK	9.4	420	<b>793</b>	700
152.0	50.0	39.5	<b>MC HB155050152</b>	STOCK	11.0	523	<b>986</b>	700
152.0	60.0	49.5	<b>MC HB155060152</b>	STOCK	12.6	625	<b>1 180</b>	1 000
188.0	40.0	29.5	<b>MC HB155040188</b>	STOCK	11.5	520	<b>982</b>	700
188.0	50.0	39.5	<b>MC HB155050188</b>	STOCK	13.5	634	<b>1 196</b>	1 000
188.0	60.0	49.5	<b>MC HB155060188</b>	STOCK	15.5	758	<b>1 431</b>	1 000


### Standard



Heating element  
Résistance  
Heizstab  
Resistencia

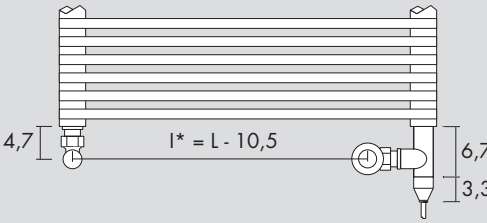


### Optional



Receiver  
Récepteur  
Empfänger  
Receptor

**R10**



ECODESIGN  
Digital chronothermostat  
Chronothermostat digital  
Der digital Chronothermostat  
Cronotermostato digital

**T11**

Dual electric element with thermostat / Mixte résistance avec thermostat / Kombimodell mit Raumthermostat / Versión mixta con termostato ambiente

H cm	L cm	I* cm	art*	[B] STOCK	Lt*	watt Δt 30°	watt Δt 50°	watt
80.0	40.0	29.5	<b>MT HB155040080</b>	STOCK	5.1	236	<b>446</b>	350
80.0	50.0	39.5	<b>MT HB155050080</b>	STOCK	6.0	295	<b>556</b>	500
80.0	60.0	49.5	<b>MT HB155060080</b>	STOCK	6.9	352	<b>665</b>	500
116.0	40.0	29.5	<b>MT HB155040116</b>	STOCK	7.3	330	<b>622</b>	500
116.0	50.0	39.5	<b>MT HB155050116</b>	STOCK	8.5	410	<b>774</b>	700
116.0	60.0	49.5	<b>MT HB155060116</b>	STOCK	9.8	490	<b>925</b>	700
152.0	40.0	29.5	<b>MT HB155040152</b>	STOCK	9.4	420	<b>793</b>	700
152.0	50.0	39.5	<b>MT HB155050152</b>	STOCK	11.0	523	<b>986</b>	700
152.0	60.0	49.5	<b>MT HB155060152</b>	STOCK	12.6	625	<b>1 180</b>	1 000
188.0	40.0	29.5	<b>MT HB155040188</b>	STOCK	11.5	520	<b>982</b>	700
188.0	50.0	39.5	<b>MT HB155050188</b>	STOCK	13.5	634	<b>1 196</b>	1 000
188.0	60.0	49.5	<b>MT HB155060188</b>	STOCK	15.5	758	<b>1 431</b>	1 000

### Standard




(P\* = 221)

Thermostat  
Thermostat  
Der Thermostat  
Termostato

[BIAN] [CROM]

Infrared remote control  
Télécommande infrarouge  
Infrarot-Fernbedienung  
Mando por infrarrojos






(P\* = 224)

Angled Valve  
Vanne équerre  
Eckausführung Ventil  
Válvula a escuadra


[BIAN] **E12SQB**  
[CROM] **E12SQR**



(P\* = 226)

Thermostatic head  
Tête thermostatique  
Thermostatkopf  
Cabezal termostático


[BIAN] **TTB**  
[CROM] **TTR**

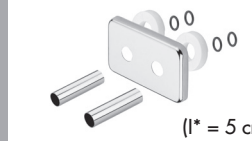

(I\* = 5 cm)


Sleeving kit  
Kit couvre tuyau  
Rosetten  
Kit cubre tubo

[BIAN] **C5B**  
[CROM] **C5R**

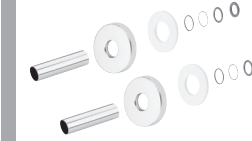

Ø ≤ 16 mm  
[BIAN] **CTB**  
[CROM] **CTR**

16 mm < Ø < 24 mm  
[BIAN] **CWB**  
[CROM] **CWR**

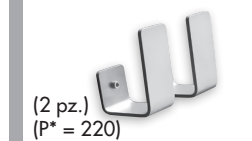

(2 pz.)  
(P\* = 220)

Towel hooks  
Paire de patère  
Crochet das Bugel  
Percha

[INOX] **3A20X**

art\* = item / modèle / Artikel / artículo    I\* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones  
 Lt\* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento  
 P\* = page / page / Seite / página