


**Oreste & Emma**  
DESIGN ANDREA CROSETTA

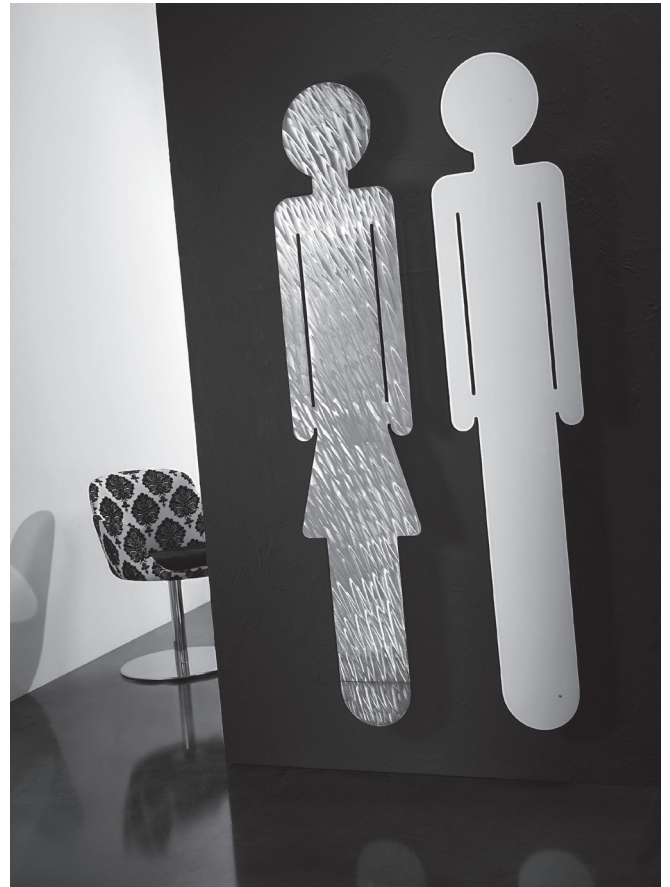

Kcal = Watt x 0.860  
BTU = Watt x 3.413

Watt Δt 60° = Watt Δt 50° x 1.241  
Watt Δt 40° = Watt Δt 50° x 0.768  
Watt Δt 30° = Watt Δt 50° x 0.546  
Watt Δt 20° = Watt Δt 50° x 0.338

p max = 10.0 bar

**Oreste**

H cm	L cm	I* cm	art*	Lt*	watt Δt 30°	watt Δt 50°	watt Δt 30°	watt Δt 50°
172.0	34.0	5.0	<b>OEO172001_</b>	1.7	202	<b>370</b>	141	<b>259</b>

**Emma**

H cm	L cm	I* cm	art*	Lt*	watt Δt 30°	watt Δt 50°	watt Δt 30°	watt Δt 50°
172.0	34.0	5.0	<b>OEE172001_</b>	1.7	202	<b>370</b>	141	<b>259</b>

**CRSM** Brushed chrome / Chrome brossé / Gebürstet Chrome / Cromo cepillado

**GLSM** Brushed gold / Doré brossé / Gebürstet Gold / Oro cepillado

**Optional**

 (P* = 225)	 (P* = 226)	 (I* = 5 cm)
Angled monotube Valve Vanne monotube équerre Eijrohrige Ventil Válvula monotubo a escuadra	Thermostatic head Tête thermostatique Thermostatkopf Cabezal termostático	Sleeving kit Kit couvren tuyau Rosetten Kit cubre tubo
[BIAN] <b>E12MBSQB</b> [CROM] <b>E12MBSQR</b>	[BIAN] <b>TTB</b> [CROM] <b>TTR</b>	[BIAN] <b>C5B</b> [CROM] <b>C5R</b>

art\* = item / modèle / Artikel / artículo    I\* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones  
Lt\* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento  
P\* = page / page / Seite / página